


EARTHING PRODUCTS


Earth Points

Earth Points					
Number of Holes	Thread	Weight	Rebar Detail	Description	Ordering Code
1	M12	810g		EP1M12 with pre-welded 500mm PVC insulated 70mm ² Cable	EP1M1257T
1	M12	860g	100mm length x 10mm diameter Rebar	EP1M12 with pre-welded 500mm PVC insulated 70mm ² Cable and Rebar	EP1M1257TR
2	M12	700g		EP2M12 with pre-welded 500mm PVC insulated 70mm ² Cable	EP2M1257T
2	M12	750g	100mm length x 10mm diameter Rebar	EP2M12 with pre-welded 500mm PVC insulated 70mm ² Cable and Rebar	EP2M1257TR
4	M12	950g		EP4M12 with pre-welded 500mm PVC insulated 70mm ² Cable	EP4M1257T
4	M12	1000g	100mm length x 10mm diameter Rebar	EP4M12 with pre-welded 500mm PVC insulated 70mm ² Cable and Rebar	EP4M1257TR

• Other cable sizes available upon request

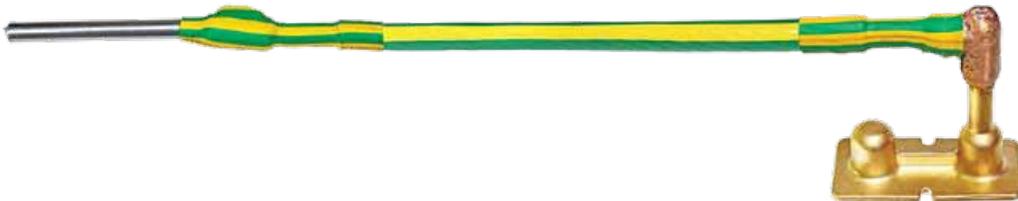

Bonding Cables

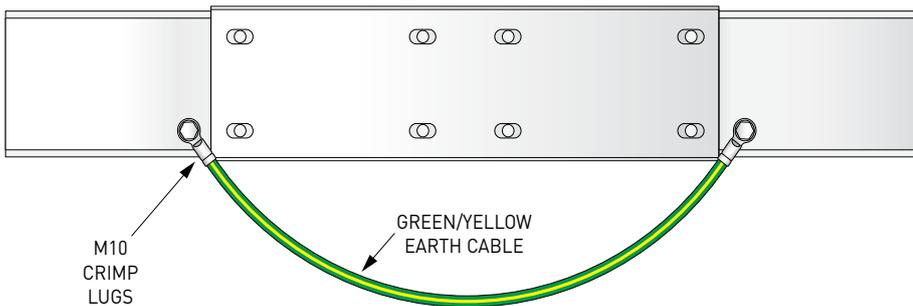

LPI offers an extensive range of cable earth bonds and flexible tinned copper braids for the electrical earthing of cable ladder, conveyors, handrails, metal cladding, water pipes, fences and gates.

Ordering Information

LPI Ordering Code: ESXXX-YY
 XXX = Cable Length
 YY = Cable Diameter

All bonding cables supplied with M10 Crimp Lug and M10 stainless steel fasteners.

