


09 833 5749 | info@lpinz.co.nz

Copper Earthing Strip

Copper strip terminal

Single wire Cu ETP UNI 5649-71. Similar to DIN 72333

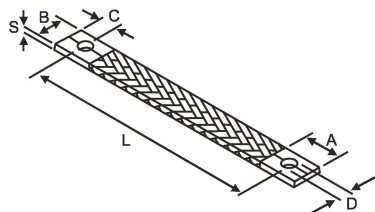


Part No .	Cross-Section mm ²	Wire dia mm	A mm	B mm	C mm	D mm	S mm	L mm
CGS6-100	6	0.10	13	11	5	7	2.0	100
CGS6-150	6	0.10	13	11	5	7	2.0	150
CGS6-200	6	0.10	13	11	5	7	2.0	200
CGS10-100	10	0.20	23	17	10	9	2.0	100
CGS10-150	10	0.20	23	17	10	9	2.0	150
CGS10-200	10	0.20	23	17	10	9	2.0	200
CGS10-300	10	0.20	23	17	10	9	2.0	300
CGS16-100	16	0.20	23	17	10	9	2.5	100
CGS16-150	16	0.20	23	17	10	9	2.5	150
CGS16-200	16	0.20	23	17	10	9	2.5	200
CGS16-300	16	0.20	23	17	10	9	2.5	300
CGS25-100	25	0.20	23	23	10	9	3.2	100
CGS25-150	25	0.20	23	23	10	9	3.2	150
CGS25-200	25	0.20	23	23	10	9	3.2	200
CGS25-300	25	0.20	23	23	10	9	3.2	300
CGS35-100	35	0.20	23	23	10	9	3.4	100
CGS35-150	35	0.20	23	23	10	9	3.4	150
CGS35-200	35	0.20	23	23	10	9	3.4	200
CGS35-300	35	0.20	23	23	10	9	3.4	300
CGS50-100	50	0.20	30	30	15	11	4.5	100
CGS50-150	50	0.20	30	30	15	11	4.5	150
CGS50-200	50	0.20	30	30	15	11	4.5	200
CGS50-300	50	0.20	30	30	15	11	4.5	300
CGS75-150	75	0.20	30	30	15	11	5.0	150
CGS75-200	75	0.20	30	30	15	11	5.0	200
CGS75-300	75	0.20	30	30	15	11	5.0	300
CGS100-100	100	0.20	35	35	15	13	6.0	150
CGS100-200	100	0.20	35	35	15	13	6.0	200
CGS100-300	100	0.20	35	35	15	13	6.0	300

The lengths, cross-sectional areas, and drill sizes which are not mentioned in table above, can be manufactured upon request.

EARTHING FITTINGS

Earthing Copper Strip 0.20 Type




Tinned copper strips terminals 17 × 23mm

Holes Φ 9mm; on request 5–6–7mm

2 cross-section: 16mm² or 10mm² bare or tinned

Red copper, wire 0.20 mm – tinned terminal

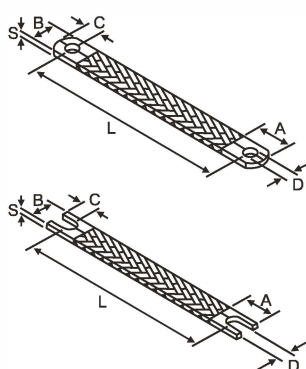


Part No .	Cross-Section mm ²	Wire dia mm	A mm	B mm	C mm	D mm	S mm	L mm
RSC10-100	10	0.20	23	17	10	9	2.0	100
RSC10-150	10	0.20	23	17	10	9	2.0	150
RSC10-200	10	0.20	23	17	10	9	2.0	200
RSC10-250	10	0.20	23	17	10	9	2.0	250
RSC10-300	10	0.20	23	17	10	9	2.0	300
RSC16-100	16	0.20	23	17	10	9	2.5	100
RSC16-150	16	0.20	23	17	10	9	2.5	150
RSC16-200	16	0.20	23	17	10	9	2.5	200
RSC16-250	16	0.20	23	17	10	9	2.5	250
RSC16-300	16	0.20	23	17	10	9	2.5	300

Round Earthing Strip (with lugs)



Round braid

Part No .	Cross-Section mm ²	Wire dia mm	L mm	D1 mm	D2 mm	Φ mm
RGS-6	6	0.10	150	6.4	6.4	4.0
RGS-10	10	0.20	200	6.4	6.4	5.0
RGS-16	16	0.20	200	8.4	8.4	6.6
RGS-25	25	0.20	200	8.4	8.4	7.6
RGS-35	35	0.20	250	10.5	10.5	9.5
RGS-50	50	0.20	250	10.5	10.5	11.5
RGS-75	75	0.20	300	13.2	13.2	13.7
RGS-100	100	0.20	300	13.2	13.2	16.0



Round stranded copper cables with overall copper braid

Part No .	Cross-Section mm ²	Wire dia mm	L mm	D1 mm	D2 mm	Φ mm
RSC-38	38	0.20	300	8.4	8.4	9.5
RSC-50	50	0.20	300	8.4	8.4	11.5
RSC-100	100	0.20	300	10.5	10.5	16.0

Widths, lengths, cross-sections and bores are not included in table above, they are provided at request.

Special insulation, transparent PVC-jacket are provided at request.